



クラス2500フランジ寸法表(平面座の場合)


突合せ溶接形

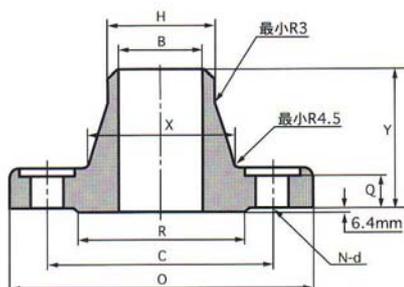

ブラインド形

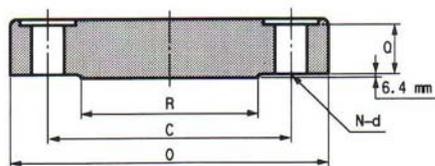

一体形

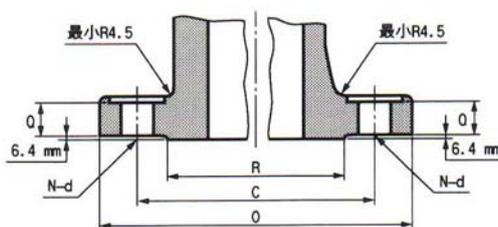

単位:mm

呼び径			内径 突合せ 溶接形	ハブ元 の径	ハブ先 の径	座の径	厚さ (最小)	全長 突合せ 溶接形	ボルト穴			ボルトの ねじの 呼び	ボルトの 長さ (参考) スタッド ボルト	
A	B	外径 O							中心円 の径	穴の数	穴の径			
15	1/2	133	注文者 の 指定に よる。	43.0	21.7	35.1	30.5	73.2	88.9	4	22	3/4_10UNC	125	
20	3/4	140		51.0	27.2	42.9	32.0	79.2	95.2	4	22	3/4_10UNC	125	
25	1	159		57.0	34.0	50.8	35.5	88.9	108.0	4	26	7/8_9UNC	140	
(32)	(1 1/4)	184		73.0	42.7	63.5	38.5	95.2	130.0	4	29	1_8UNC	150	
40	1 1/2	205		79.0	48.6	73.2	44.5	111.3	146.0	4	32	1 1/8_8UN	170	
50	2	235		95.0	60.5	91.9	51.0	127.0	171.4	8	29	1_8UNC	175	
65	2 1/2	267		114	76.3	104.6	57.5	142.7	196.8	8	32	1 1/8_8UN	195	
80	3	305		133	89.1	127.0	67.0	168.1	228.6	8	35	1 1/4_8UN	220	
(90)	(3 1/2)	-		-	-	-	-	-	-	-	-	-	-	-
100	4	356		165	114.3	157.2	76.5	190.5	273.0	8	42	1 1/2_8UN	255	
(125)	(5)	419		203	139.8	185.6	92.0	228.6	323.8	8	48	1 3/4_8UN	295	
150	6	483		235	165.2	215.9	108.0	273.0	368.3	8	54	2_8UNC	345	
200	8	550	305	216.3	269.7	127.0	317.5	438.2	12	54	2_8UNC	380		
250	10	675	375	267.4	323.8	165.5	419.1	539.8	12	67	2 1/2_8UN	485		
300	12	760	441	318.5	381.0	184.5	463.6	619.3	12	74	2 3/4_8UN	535		